

Data Sheet

IBR600C Series Router

The Cradlepoint IBR600C Series Router for IoT networks is a semi-ruggedized, cloud-managed LTE router, built for IoT and M2M applications. They provide a resilient, LTE connection ideal for use in high-availability, portable, or fixed uses. The IBR600C Series is available with IoT NetCloud Service Plans, which provide features optimized for each unique deployment.

Semi-Ruggedized IoT Solution

When coupled with the NetCloud IoT service plan, the IBR600C router provides a compact semi-ruggedized 4G LTE router solution for connecting and protecting IoT devices at scale. It is ideal for use in high-availability portable or fixed applications such as surveillance cameras, digital signs, oil and gas monitoring, and parallel networking. With an extensive list of features, it can be confidently deployed in the field, in buildings, or in embedded systems to deliver complete visibility, security, and control of connected devices anywhere.

Robust Cloud Managed IoT Solution

For organizations requiring robust connectivity for IoT networks — with installed routers numbering from hundreds to many thousands — Cradlepoint's NetCloud Service for IoT with the IBR600C router provides a comprehensive cloud managed network solution. When coupled with advanced IoT features, it provides troubleshooting and diagnostics with in-band and out-of-band management, extensive analytics and insights, and extensibility and integrations such as Microsoft Azure IoT Central. Cradlepoint's NetCloud-managed IoT endpoints can be rapidly deployed and easily scaled to accommodate the diverse requirements of organizations.

Notable Features

- Define policies through centralized, cloud-based management for easy deployment at scale.
- Gain fast, reliable connectivity with an embedded Cat 4 modem with dual SIM support.
- Expand working radius and IoT connectivity with secure, enterprise class Wi-Fi.
- Provide a semi-ruggedized, portable solution capable of enduring harsh environments.
- Utilize Configurable GPIO ports and NetCloud Integrations for IoT applications.
- Customize and extend NetCloud Service functionality with NetCloud SDK and API.




Key Software Capabilities

Cradlepoint NetCloud Service for the IBR600C Series Router includes the appropriate router software with powerful cloud management features for managing IoT at scale. The NetCloud Service includes cloud-based management for optimizing routing, VPN, SD-WAN, and security capabilities. The cloud capabilities include defining and applying policies, at-a-glance status insights, reports, troubleshooting, and analytics dashboards. The service includes a warranty for as long as there is an active subscription on the router, online training, live and online support, and all software and firmware updates.


Router Services

Next generation hardware provides local processing power to handle demanding, router-delivered services, such as support for VPN tunneling encryption including DMVPN, IPsec, GRE, and other tunneling technologies.

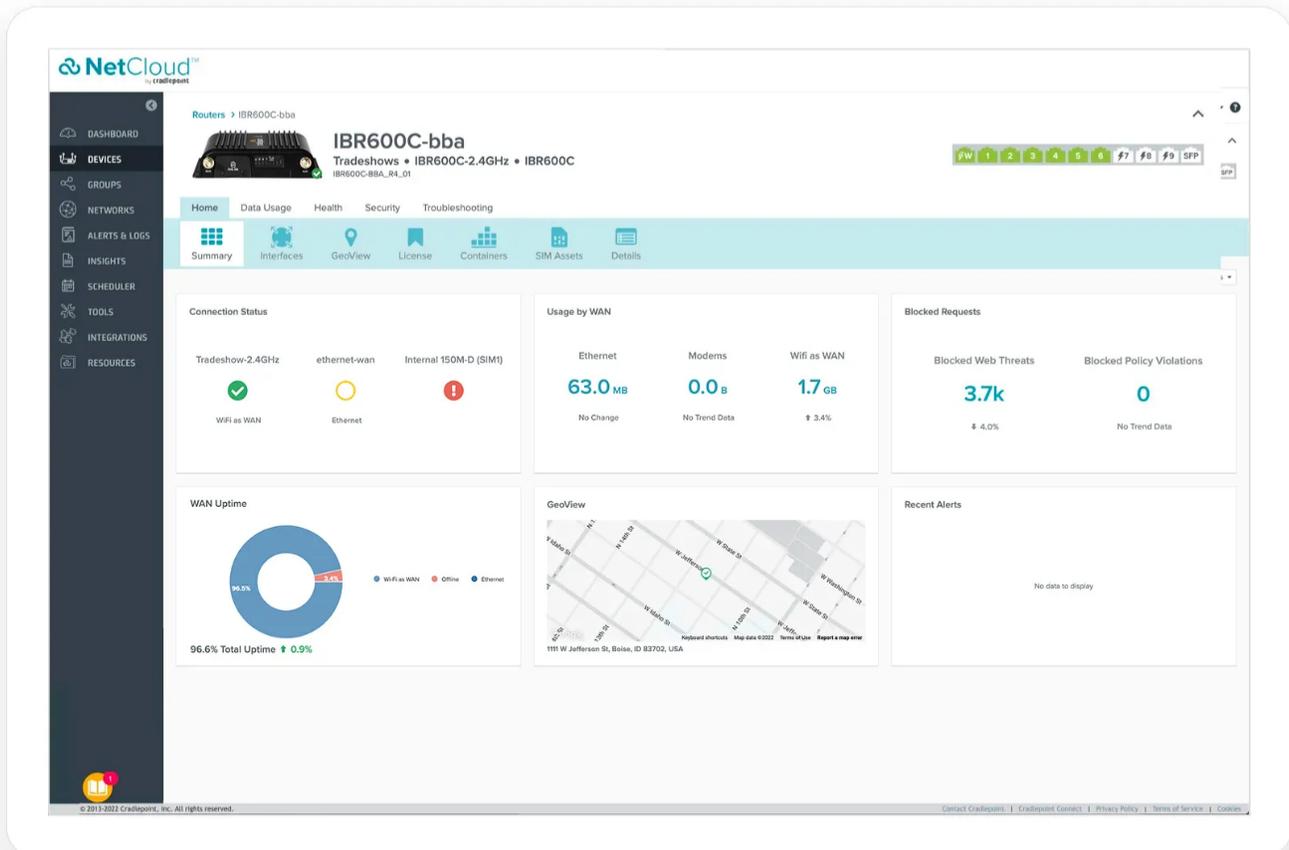


Security Services

NetCloud Service includes security features and options to optimize the IBR600C Series Router to meet the evolving security needs of IoT. The service includes a stateful zone-based firewall, an authenticated wireless connection that is fully isolated from the surrounding networks, and the ability to add content filtering with Zscaler.

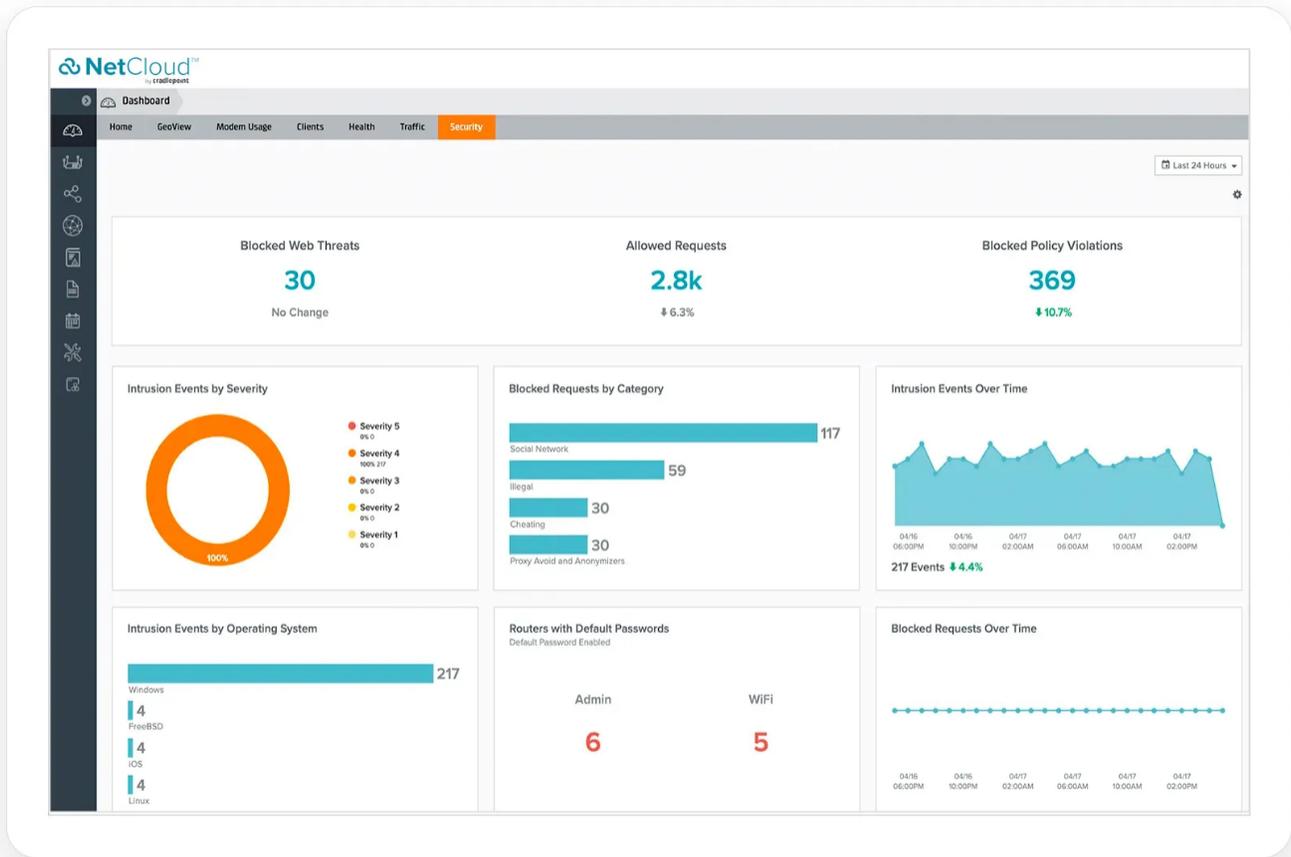


Extensibility and Integrations

NetCloud Service and the IBR600C Series Router can access network data that third-party applications need to provide higher levels of insights and control. Leverage pre-built connections to partner applications or create custom connections across a variety of use cases using the NetCloud SDK or NetCloud API.

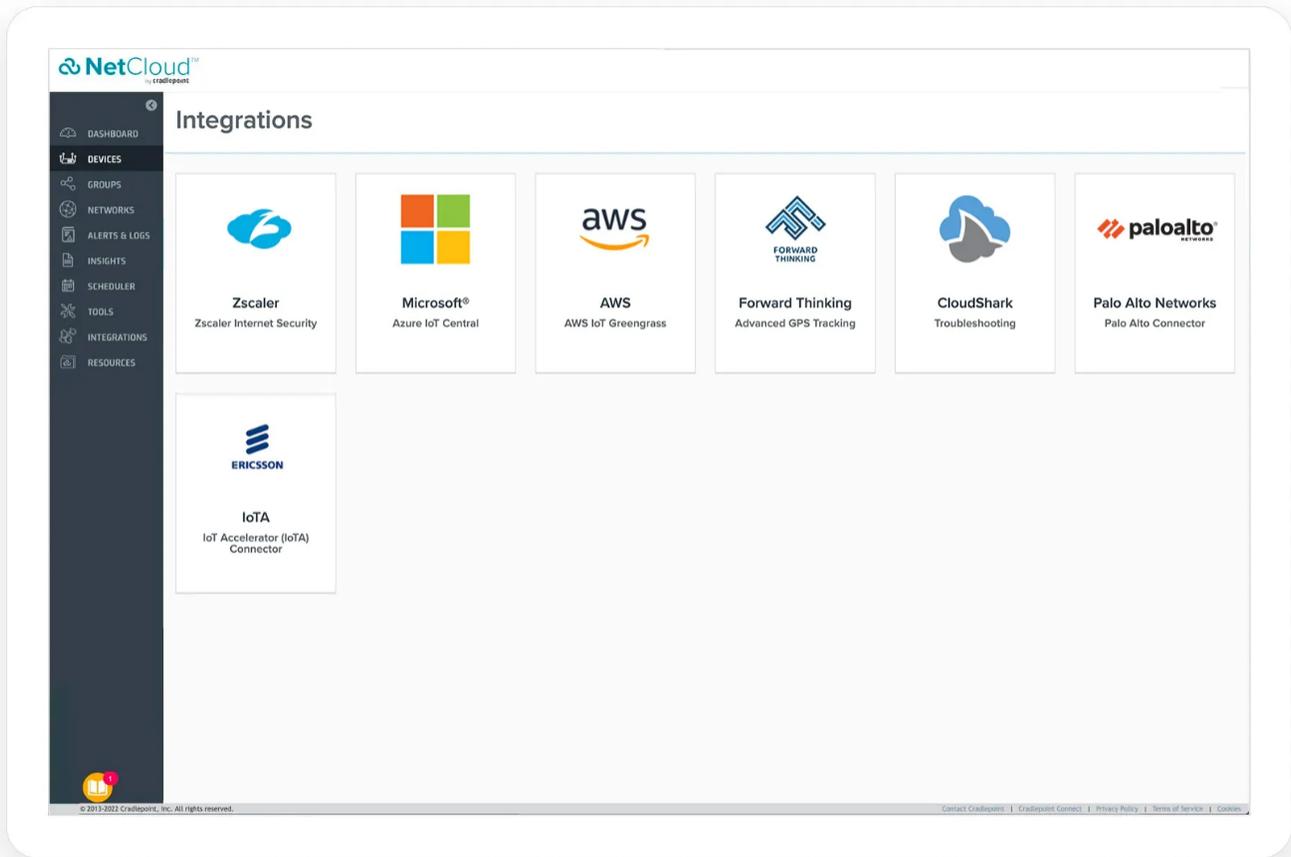

Cloud Services

NetCloud Manager delivers true, zero-touch deployment with the ability to define and deliver policy across entire groups of endpoints. Users can create a cloud-orchestrated hub and spoke VPN network and gain insights and analytics required for rapid troubleshooting and diagnostic workflows.

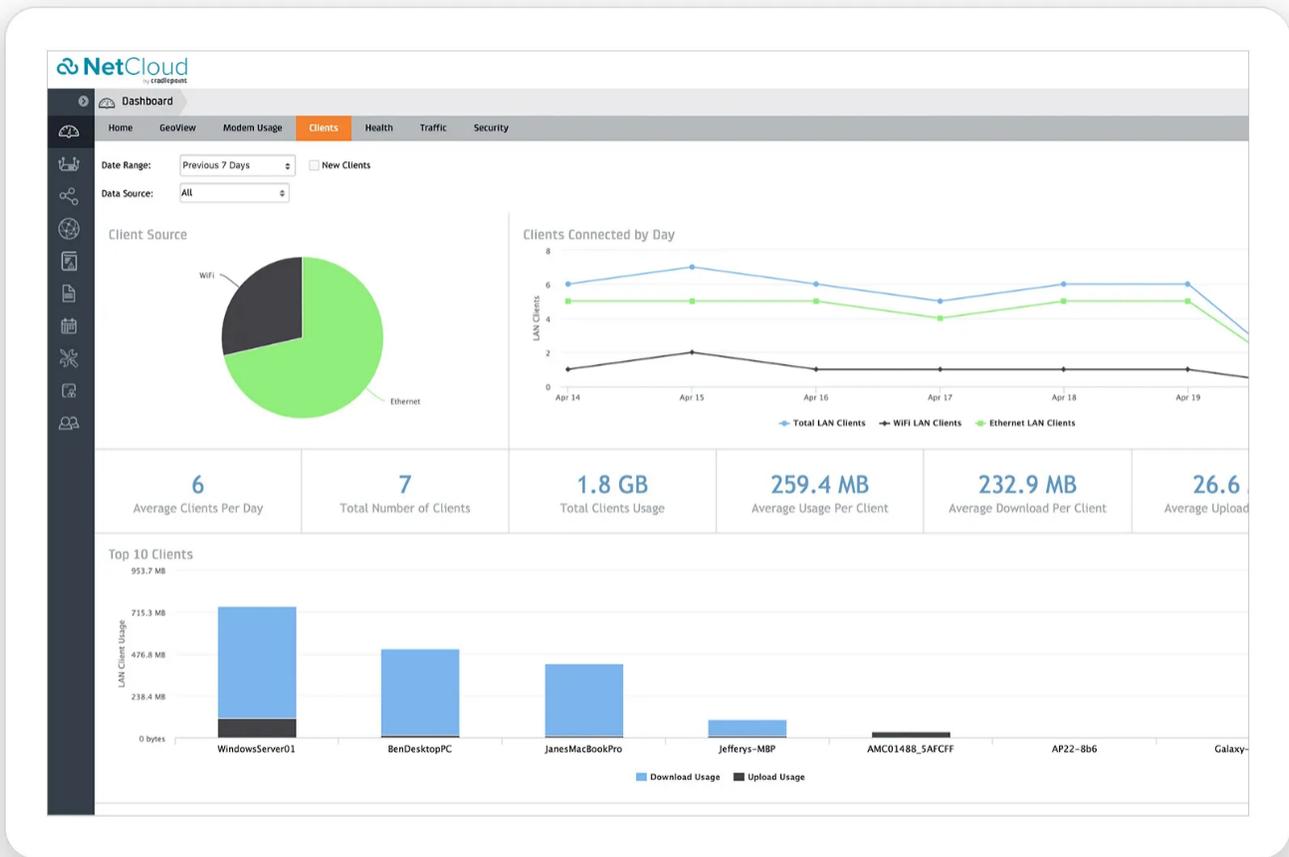

Hardware Specifications

The following features are delivered through the hardware.

| INTERFACES | |
|-------------------|--|
| Modem: | <ul style="list-style-type: none"> — Embedded 150M modem with 2 x SMA cellular antenna connectors — Optional dual modem (requires the the COR Extensibility Dock) with Modular MC400 Modem |
| Ethernet: | <ul style="list-style-type: none"> — 1 x GbE (LAN/WAN switchable) — 1 x FE (LAN/WAN switchable) |
| Wi-Fi: | <ul style="list-style-type: none"> — Single-radio, single-band (2.4 GHz) — 2x2 MIMO 802.11b/g/n Wi-Fi 4 — 300 Mbps (2.4 GHz) — Two (2) Wi-Fi SSIDs — WPA/WPA2/WPA3 Personal, WPA2/ WPA3 Enterprise, Open |
| Expansion: | <ul style="list-style-type: none"> — 1 x USB 2.0 Type A (output: 5V, 500mA, 2.5W) — 1 x Extensibility Port <ul style="list-style-type: none"> — Extensibility Dock — 9-Wire Power and GPIO Cable — Serial Port Adapter |

| | |
|--|---|
| GNSS/GPS: | 1 x SMA GNSS antenna connector |
| ENVIRONMENTAL | |
| Temperature: | <ul style="list-style-type: none"> — Operating: -20 °C to 60 °C (-4 °F to 140 °F) — Storage: -20 °C to 70 °C (-4 °F to 158 °F) |
| Humidity: | <ul style="list-style-type: none"> — Operating: 5% to 95% — Storage: 5% to 95% |
| POWER | |
| Required: | One of the following: <ul style="list-style-type: none"> — 9-33 VDC steady state input — External DC power supply, 100-240 VAC input, 12 VDC 3A output (included) |
| Features: | <ul style="list-style-type: none"> — Reverse polarity and transient voltage protection (ISO 7637-2) — Ignition sensing (automatic ON and time-delay OFF) |
| Consumption: | <ul style="list-style-type: none"> — Idle: 4 W — Wi-Fi TX/RX: 9 W — LTE TX/RX: 6.25 W |
| PHYSICAL | |
| Size: | 118 x 113.5 x 29.3 mm (4.6 x 4.5 x 1.2 in) |
| Weight: | 400 g (14 oz) |
| CERTIFICATIONS | |
| Safety: | UL/cUL, CB Scheme, EN 60950-1, EN 62368-1, MIL-STD 810G, SAE J1455 |
| Materials: | WEEE, RoHS, REACH, California Prop 65 |
| WI-FI POWER | |
| FCC: | 2.4 GHz band: 28.1 dBm Conducted |
| Rest of World: | <ul style="list-style-type: none"> — 2.4 GHz band: 15 dBm Conducted — 2.4 GHz band: 20 dBm EIRP |
| PERFORMANCE | |
| Stateful Firewall Throughput: | 75 Mbps |
| IPSec VPN Throughput: | 10 Mbps |
| Concurrent VPN Tunnels: | 5 |
| Concurrent Sessions (TPC): | 16,000 |
| Typical Client Count: | 5 |
| LEDs | |
| Refer to the IBR600C Series IoT Router Quick Start Guide . | |

Performance testing conducted based on requirements as defined in RFC2544 using fixed-frame 1518 byte packets. Throughput results reflect uni-directional UDP traffic with less than 1% packet loss as tested with wired connections.

Results do not reflect performance of the cellular wireless operator networks.


Enterprise-Class Modem Specifications

| SPECIFICATION | 150M-D (NORTH AMERICA) | 150M-B (EUROPE) | 150M-C (APAC) |
|---------------|------------------------|-----------------|---------------|
|---------------|------------------------|-----------------|---------------|



| | | | |
|--|---|---|---|
| Technology: | LTE Cat 4 (3GPP Rel. 11), DC-HSPA+ <ul style="list-style-type: none"> — Dual SIM slots, 2FF form factor — SIM-based auto-carrier selection | Cat 4 LTE (3GPP Rel. 11), DC-HSPA+ <ul style="list-style-type: none"> — Dual SIM slots, 2FF form factor — SIM-based auto-carrier selection | LTE Cat 4 (3GPP release 11), DC-HSPA+ <ul style="list-style-type: none"> — Dual SIM slots, 2FF form factor — SIM based auto carrier select |
| Fallback: | WCDMA/UMTS/HSPA+ | WCDMA/UMTS/HSPA+ | WCDMA/UMTS/HSPA+ |
| Carrier Aggregation: | N/A | N/A | N/A |
| Peak Downlink Rates: | <ul style="list-style-type: none"> — LTE: 150 Mbps — WCDMA: 42.2 Mbps | <ul style="list-style-type: none"> — LTE: 150 Mbps — WCDMA: 42.2 Mbps | <ul style="list-style-type: none"> — LTE: 150 Mbps — WCDMA: 42.2 Mbps |
| Peak Uplink Rates: | <ul style="list-style-type: none"> — LTE 50 Mbps — WCDMA: 5.76 Mbps | <ul style="list-style-type: none"> — LTE 50 Mbps — WCDMA: 5.76 Mbps | <ul style="list-style-type: none"> — LTE 50 Mbps — WCDMA: 5.76 Mbps |
| MIMO: | 2x2 MIMO | 2x2 MIMO | 2x2 MIMO |
| QAM: | Up to 16 | Up to 16 | Up to 16 |
| LTE Bands: | LTE FDD <ul style="list-style-type: none"> — B2, B4, B5, B12, B13, B14, B66, B71 | LTE TDD <ul style="list-style-type: none"> — B38, B40, B41 LTE FDD <ul style="list-style-type: none"> — B1, B3, B5, B7, B8, B20 | LTE FDD <ul style="list-style-type: none"> — B1, B3, B5, B7, B28 |
| WCDMA Bands: | B2, B4, B5 | LTE FDD B1, B5, B8 | LTE FDD <ul style="list-style-type: none"> — B1, B5 |
| Power: | LTE 23 dBm ± 1, DC-HSPA+ 23 dBm ± 1 (typical conducted) | LTE 23 dBm ± 1; HSPA+ 23 dBm ± 1 (typical conducted) | LTE 23 dBm ± 1; HSPA+ 23 dBm ± 1 (typical conducted) |
| Antennas: | SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included) | SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included) | SMA female connectors, external 600 MHz - 6 GHz cellular paddle antennas (Qty 2, included) |
| GNSS/GPS: | Passive GNSS <ul style="list-style-type: none"> — GPS, GLONASS, BeiDou, Galileo | Passive GNSS <ul style="list-style-type: none"> — GPS, GLONASS, BeiDou, Galileo | Passive GNSS <ul style="list-style-type: none"> — GPS, GLONASS, BeiDou, Galileo |
| SMS: | Yes | Yes | Yes |
| Regulatory: | FCC (U.S.), IC (Canada) | CE (European Union) | RCM (AU/NZ) |
| Network Operator Standards: | PTCRB (U.S., Canada) | GCF (Worldwide) | GCF (Worldwide) |
| Network Operator Certifications: | AT&T, Verizon [†] | See note [†] | See note [†] |
| Public Safety Network Certifications: | FirstNet Ready™ | N/A | N/A |
| Private Cellular Network: | N/A | N/A | N/A |

[†]Cellular carriers and operators throughout the world may only require telecom industry certifications, like PTCRB or GCF, to operate on their network. Some carriers require additional testing and approval, beyond telecom certifications. A carrier listed in the approvals section means Cradlepoint completed additional testing and acquired technical approval for that given carrier. Any carrier not listed may not require additional testing or approval beyond telecom industry certifications to operate on their network.


Physical Measurements & Features

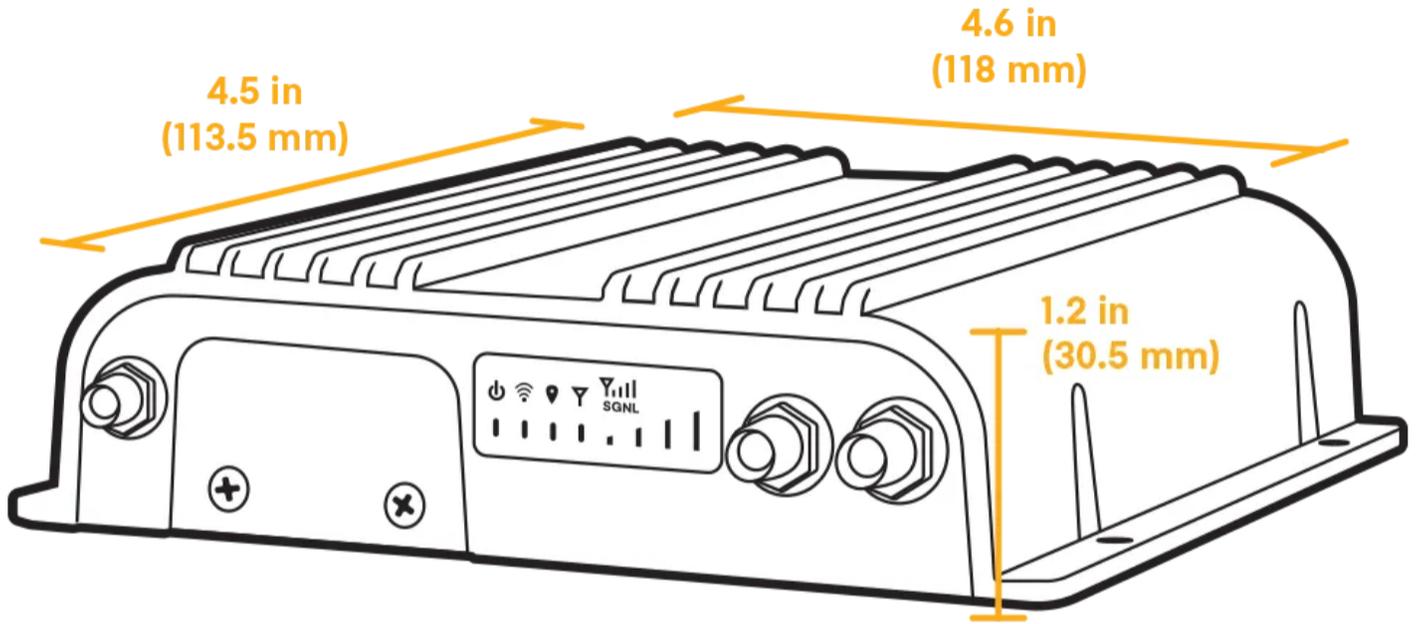

Features

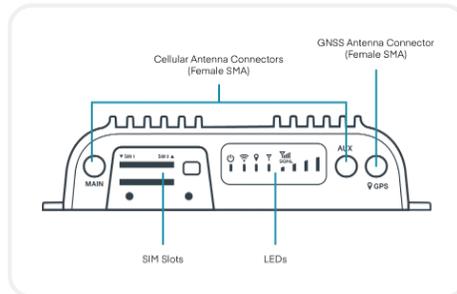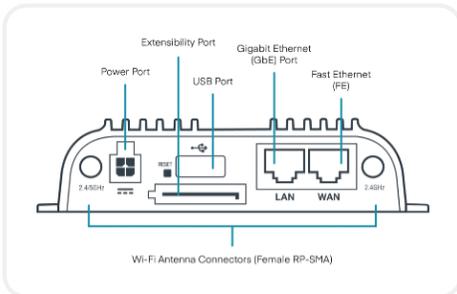

SIM Card Info

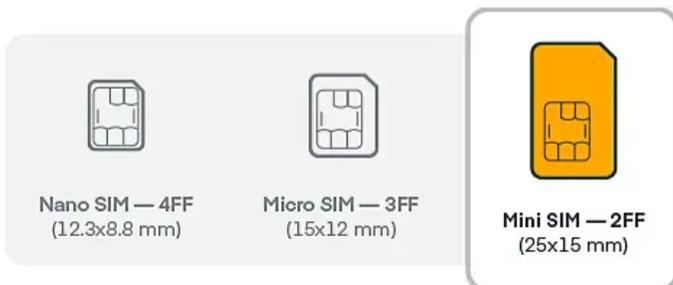

Ordering Guide

NetCloud IoT Essentials packages and plans contain all the features and capabilities required for a broad range of IoT applications. Essentials Packages include 24x7 support (phone support: 24 hour weekdays with emergency response on weekends, web: 24x7, chat: 24x5) and a limited lifetime warranty.

For additional capabilities, a **NetCloud IoT Advanced Plan** can be added to the NetCloud Essentials package at any time.

See additional details of what is included in the Essential and Advanced NetCloud software: cradlepoint.com/netcloud-service

NetCloud IoT Packages for the IBR600C Series Router

| REGION | MODEM | IOT PACKAGE PLAN | PART NUMBER |
|---|--|-------------------------------|----------------------|
| North America: U.S. & Canada | Cat 4 (150 Mbps) with Wi-Fi | Essentials | TBy-600C150M-NNN |
| | | Essentials + Advanced | TBAy-600C150M-NN |
| | Cat 4 (150 Mbps) without Wi-Fi | Essentials | TBy-650C150M-NoN |
| | | Essentials + Advanced | TBAy-650C150M-NN |
| U.S. Federal Government | TAA Compliant NC — Cat 4 (150 Mbps) with Wi-Fi | Essentials + Advanced | TAA-TBAy-600C150M-NN |
| Worldwide: European Union, Saudi Arabia, South Africa, United Arab Emirates & United Kingdom | Cat 4 (150 Mbps) with Wi-Fi | Essentials | TBy-600C150M-EWM |
| | | Essentials + Advanced | TBAy-600C150M-EM |
| Asia Pacific: Australia, Malaysia, New Zealand & Singapore | Cat 4 (150 Mbps) with Wi-Fi | Essentials | TBy-600C150M-PWM |
| | | Essentials + Advanced | TBAy-600C150M-PM |
| All Regions | | Advanced | TBx-NCADV |
| | | Renewal Essentials | TAX-NCESS-R |
| | | Renewal Advanced | TBx-NCADV-R |
| | | Renewal Essentials + Advanced | TBAx-NCEA-R |

x = 1, 3, or 5 years

y = 3 or 5 years

Accessories

| INCLUDED | PART NUMBER |
|---|----------------------|
| One of the following power supplies: | 170716-000 |
| Power Supply, 12V Small 2x2 1.5 meters (North America Type A) | |
| Power Supply, 12V Small 2x2 1.5 meters (North America-United Kingdom-Europe-Australia Types A-G-C-I) | 170717-000 |
| Cellular Antenna, 600 MHz - 6 GHz, SMA Black Mini (Qty 2) | 170704-002 |
| Wi-Fi Antenna, Charcoal, Dual-Band 2.4/5 GHz, RPSMA (Qty 2) | 170836-000 |
| OPTIONAL | PART NUMBER |
| GPIO Cable, SATA with Lock, Black, 1.7 meters | 170680-001 |
| Power Supply, Vehicle, 12V, 2x2 | 170635-000 |
| GPIO Cable, Small, 2x2, Black, 3 meters, 22AWG | 170585-001 |
| Rail Safe GPIO Cable, Small 2x2, Black, 3 meters, 20 AWG | 170871-000 |
| COR Extensibility Dock | 170700-000 |
| COR Extensibility Cable, SATA-DB9, Black, 305 mm | 170767-000 |
| DIN Rail Mounting Bracket | 170656-002 |
| LTE Advanced (Cat 6) modem [†] | MC400LP5 |
| LTE Advanced Pro (1200 Mbps) modem upgrade for Mobile — includes IBR1700 & COR Extensibility Dock doors, no antennas [†] | MA-MC400-1200M-B |
| UNITED STATES FEDERAL GOVERNMENT | PART NUMBER |
| Cellular Antenna, Black Mini, 600 MHz - 6 GHz, SMA, 140 mm | TAA-170704-002 |
| Wi-Fi Antenna, Charcoal, Dual-band 2.4/5 GHz, RPSMA, 194 mm | TAA-170836-000 |
| GPIO Cable, SATA with Lock, Black, 1.7 meters | TAA-170680-001 |
| Power Supply, Vehicle, 12V, 2x2, 2 meters | TAA-170635-000 |
| Power Supply, 12 V, Small 2x2, 1.5 meters (North America Type A) | TAA-170716-000 |
| Power Supply, 12 V Small 2x2, 1.5 meters (North America-United Kingdom-Europe-Australia Types A-G-C-I) | TAA-170717-000 |
| GPIO Cable, Small, 2x2, Black, 3 meters, 22 AWG | TAA-170585-001 |
| COR Extensibility Dock | TAA-170700-000 |
| COR Extensibility Cable, SATA-DB9, Black, 305 mm | TAA-170767-000 |
| DIN Rail Mounting Bracket | TAA-170656-002 |
| LTE Advanced Pro (1200 Mbps) modem upgrade for Mobile — includes IBR1700 & COR Extensibility Dock doors, no antennas [†] | TAA-MA-MC400-1200M-B |

[†]Refer to the [Cradlepoint MC400 Modular Modem](#) webpage for more information about modular modems.

Support & Warranty

The IBR600C Series Router is only sold as a component of NetCloud IoT Essentials or Essentials + Advanced Packages.

NetCloud Packages include support for the full subscription term.

All Cradlepoint hardware products are covered by a limited lifetime warranty for as long as they have a subscription license to an active NetCloud Service Plan.

More Information

Find the most up-to-date information at [cradlepoint.com/ibr600c](https://www.cradlepoint.com/ibr600c)



MOBILECORP

MobileCorp is Australia's leading Cradlepoint Partner.
Contact us about your Cradlepoint IoT project.

t. 1800 243 252

e. info@mobilecorp.com.au

w. [mobilecorp.com.au](https://www.mobilecorp.com.au)